
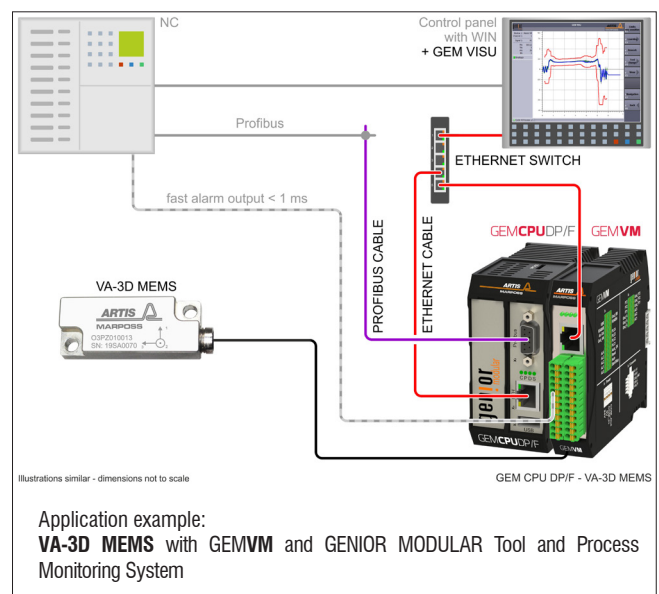
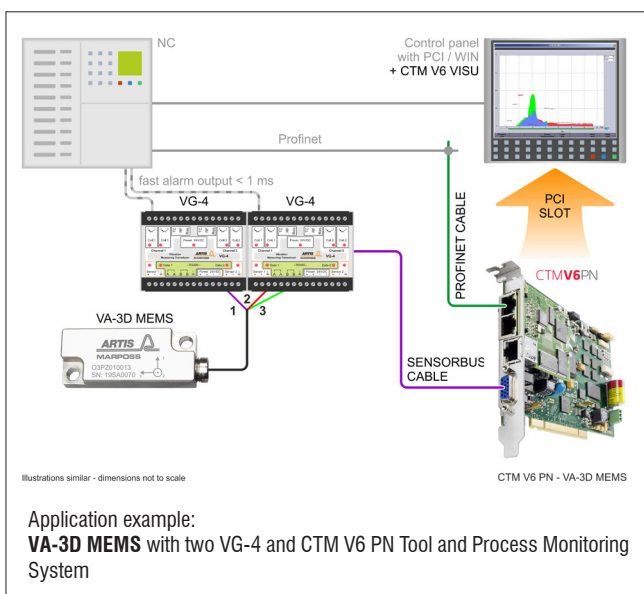



## VA-3D MEMS

### 3-AXIS ACCELERATION SENSOR

#### Properties

- Capture of acceleration signals
- MEMS technology
- For use with CTM and GENIOR MODULAR monitoring systems
- Degree of protection IP66/IPx7, resistant to cooling lubricants
- Compact design
- IEPE interface

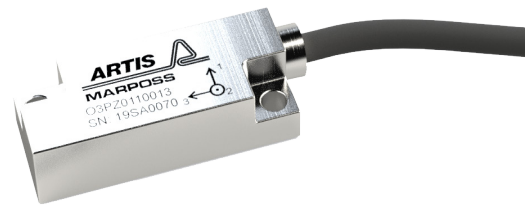

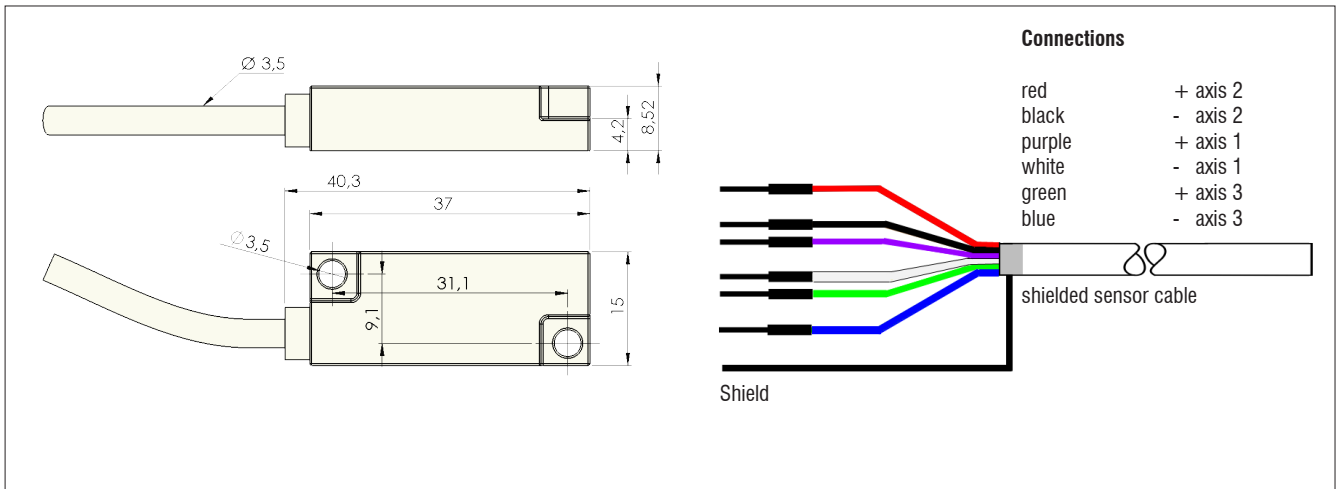


ARTICLE NUMBER	
CODE	O3PZ0110013

GENERAL DATA	
DIMENSIONS	see drawing
WEIGHT	0.237 kg (10 m connection cable included)
HOUSING MATERIAL	AISI 303
DEGREE OF PROTECTION (SENSOR WITH CABLE)	IP66/IPx7 resistant to cooling lubricants
OPERATING TEMPERATURE	0 °C – +60 °C
MOUNTING	Screw connection 2 x M3

ELECTRICAL PROPERTIES	
VOLTAGE SUPPLY	as per IEPE
OPEN CIRCUIT VOLTAGE	
SENSITIVITY PER AXIS	100 mV/g, (10.2 mV/m/s <sup>2</sup> )
TOLERANCE	± 10 %


MEASURING RANGE PER AXIS	± 8 g
FREQUENCY RANGE	Axis 1 and axis 3: 0 Hz – 2.2 kHz Axis 2: 0 Hz – 2.8 kHz
RESONANCE FREQUENCY	5.5 kHz
NOISE	20 µg/Hz <sup>0.5</sup>
MAX. ACCELERATION	4000 g (peak)
OUTPUT IMPEDANCE	typ. 80 Ω max. 140 Ω
CONFORMITY	CE, UKCA

PU-CABLE	
CABLE TYPE	Shielded cable, suitable for drag chains
CABLE DIAMETER	4.1 mm
CABLE LENGTH	10 m
WIRE SIZE	26 AWG
BENDING RADIUS	7.5 x cable diameter




*For a full list of address locations, please consult the Marposs official website*

**ODN6396EN06** – Edition 04/2022 – Specifications are subject to modifications  
© Copyright 2010-2022 MARPOSS S.p.A. (Italy) – All rights reserved.

MARPOSS,  and Marposs product names/signs mentioned or shown herein are registered trademarks or trademarks of Marposs in the United States and other countries. The rights, if any, of third parties on trademarks or registered trademarks mentioned in this publication are acknowledged to the respective owners.

**Marposs has an integrated system for Company quality, environmental and safety management, with ISO 9001, ISO 14001 and OHSAS 18001 certification.**



Download the latest version of this document

