

VA-3D



3-AXIS ACCELERATION SENSOR


Properties

- Capture of acceleration signals
- Measurement of acceleration in 3 axes (50 g per axis)
- For use with CTM and GENIOR MODULAR monitoring systems
- Compact design
- IEPE interface



Illustration similar

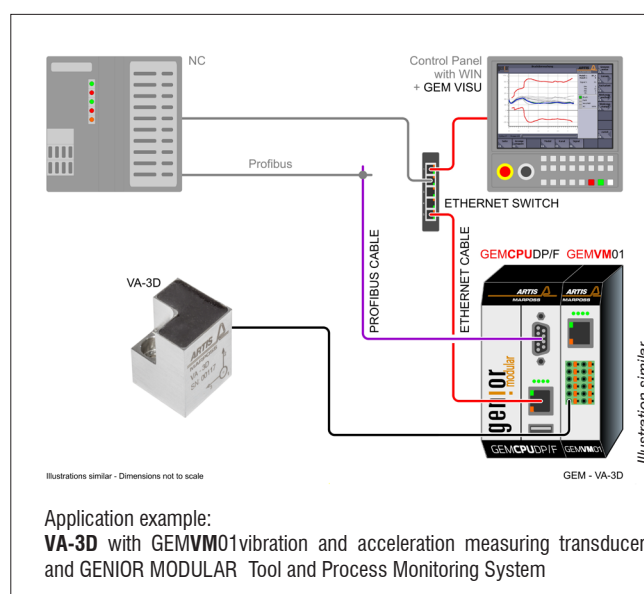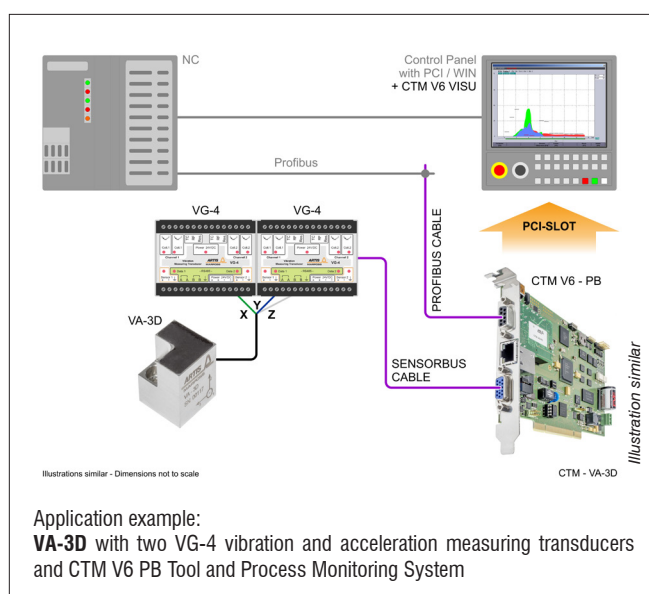

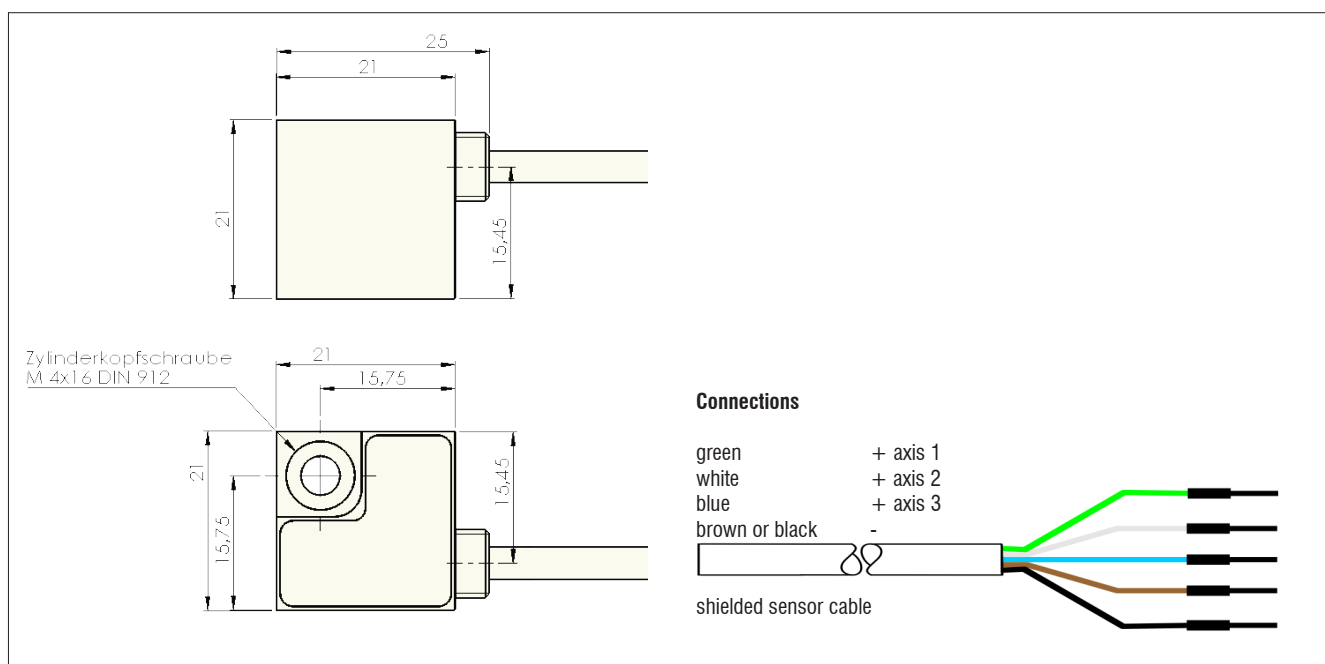

ARTICLE NUMBER	
CODE	O3PZ0111011

GENERAL DATA	
DIMENSIONS	see drawing
WEIGHT	0.328 kg
HOUSING MATERIAL	Chromium-nickel steel, cast
DEGREE OF PROTECTION (SENSOR WITH CABLE)	IP66/IPx7 resistant to cooling lubricants
OPERATING TEMPERATURE	0 °C ... +70 °C
MOUNTING	Screw connection M4

ELECTRICAL PROPERTIES	
VOLTAGE SUPPLY	as per IEPE
OPEN CIRCUIT VOLTAGE	8 – 12 V DC
SENSITIVITY PER AXIS	100 mV/g, (10.2 mV/m/s ²)
TOLERANCE	± 20 %

MEASURING RANGE PER AXIS	± 50 g
FREQUENCY RANGE	(±3 dB) 0.3 Hz – 2 kHz 0.3 Hz – 15 kHz
RESONANCE FREQUENCY	> 20 kHz
MAX. ACCELERATION	5000 g (peak)
OUTPUT IMPEDANCE	< 100 Ω
CONFORMITY	CE, UKCA

PU-CABLE	
CABLE TYPE	Shielded cable, suitable for drag chains
CABLE DIAMETER	4.1 mm
CABLE LENGTH	10 m
WIRE SIZE	26 AWG
BENDING RADIUS	7.5 x cable diameter



www.marposs.com

For a full list of address locations, please consult the Marposs official website

ODN6396EN01 – Edition 01/2025 – Specifications are subject to modifications
© Copyright 2010-2025 MARPOSS S.p.A. (Italy) – All rights reserved.

MARPOSS,  and Marposs product names/signs mentioned or shown herein are registered trademarks or trademarks of Marposs in the United States and other countries. The rights, if any, of third parties on trademarks or registered trademarks mentioned in this publication are acknowledged to the respective owners.

Marposs has an integrated system for Company quality, environmental and safety management, with ISO 9001, ISO 14001 and OHSAS 18001 certification.



Download the latest version of this document

