

## VA-XX

### ACCELERATION SENSORS

#### Properties

- Capture of acceleration signals
- For use with CTM and GENIOR MODULAR monitoring systems
- Degree of protection IP66/IPx7, resistant to cooling lubricants
- Compact design
- IEPE interface





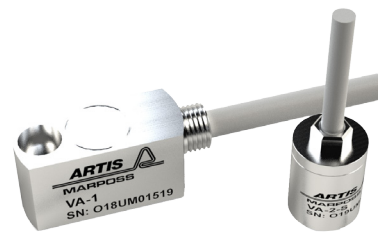



Illustration similar

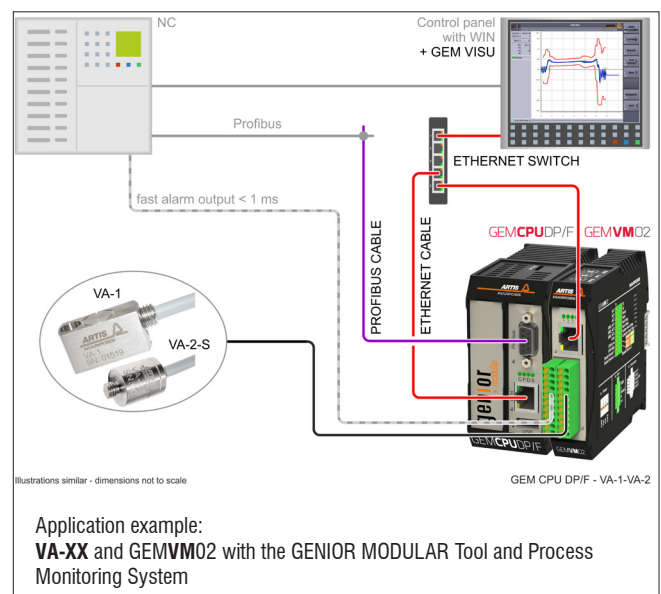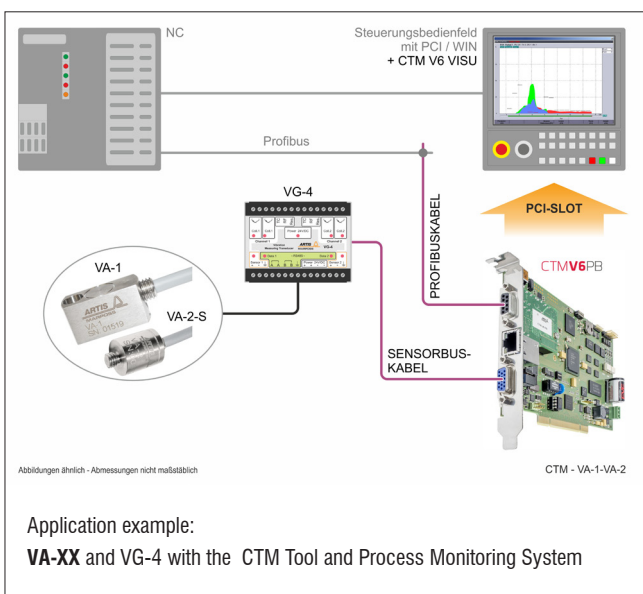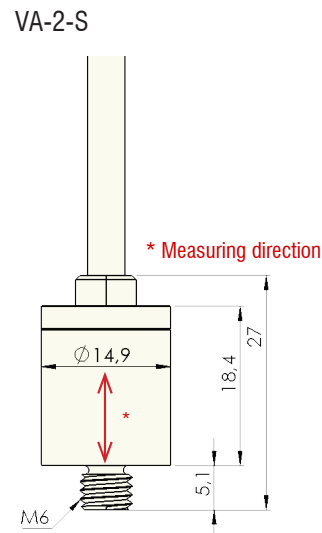

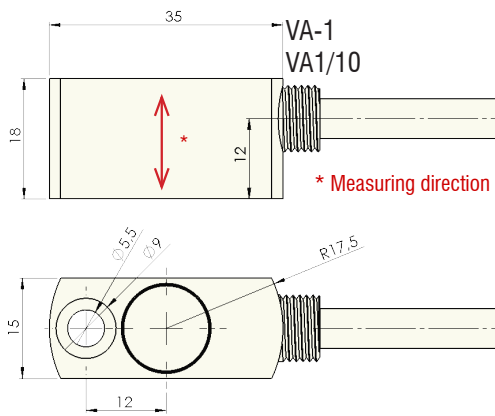

### Connections

white +  
brown -  
black shield



ARTICLE NUMBER		
CODE	Cable length 15 m	Cable length 20 m
VA-1/10	O3PZ0111007	O3PZ0111008
VA-1	O3PZ0111006	O3PZ0111005
VA-2-S	O3PZ0111002	-

GENERAL DATA	
DIMENSIONS	see drawing
WEIGHT	
VA-1/10, VA-1	0.060 kg
VA-2-S	0.018 kg
HOUSING MATERIAL	Chromium-nickel steel, cast
DEGREE OF PROTECTION (SENSOR WITH CABLE)	IP66/IPx7 resistant to cooling lubricants
OPERATING TEMPERATURE	0 °C ... +70 °C
MOUNTING	
VA-1/10, VA-1	Screw connection M5
VA-2-S	Screw connection M6

ELECTRICAL PROPERTIES	
VOLTAGE SUPPLY	as per IEPE
OPEN CIRCUIT VOLTAGE	8 – 12 V DC

SENSITIVITY	
VA-1/10	10 mV/g (1.02 mV/m/s <sup>2</sup> )
VA-1, VA-2-S	100 mV/g, (10.2 mV/m/s <sup>2</sup> )
TOLERANCE	± 20 %
MEASURING RANGE	
VA-1/10	± 500 g
VA-1, VA-2-S	± 50 g
FREQUENCY RANGE	(±3 dB) 0.3 Hz – 2 kHz 0.3 Hz – 15 kHz
RESONANCE FREQUENCY	> 4 kHz
MAX. ACCELERATION	5000 g (peak)
OUTPUT IMPEDANCE	< 100 Ω
CONFORMITY	CE, UKCA

PU-CABLE	
CABLE TYPE	Shielded cable, suitable for drag chains
CABLE DIAMETER	
VA-1/10, VA-1	6 mm
VA-2-S	4.1 mm
CABLE LENGTH	see CODE
WIRE SIZE	26 AWG
BENDING RADIUS	7.5 x cable diameter



[www.marposs.com](http://www.marposs.com)

For a full list of address locations, please consult the Marposs official website

ODN6396EN02 – Edition 04/2022 – Specifications are subject to modifications  
© Copyright 2010-2022 MARPOSS S.p.A. (Italy) – All rights reserved.

MARPOSS,  and Marposs product names/signs mentioned or shown herein are registered trademarks or trademarks of Marposs in the United States and other countries. The rights, if any, of third parties on trademarks or registered trademarks mentioned in this publication are acknowledged to the respective owners.

Marposs has an integrated system for Company quality, environmental and safety management, with ISO 9001, ISO 14001 and OHSAS 18001 certification.



Download the latest version of this document

