MARPOSS
ARTIS

Properties

- Housing with screwable back panel for **IPC**7 operator panels
- Aluminum, high thermal conductivity for optimal passive thermal dissipation
- Degree of protection IP65
- Low weight at high stability
- Mounting accessories and fastening material included
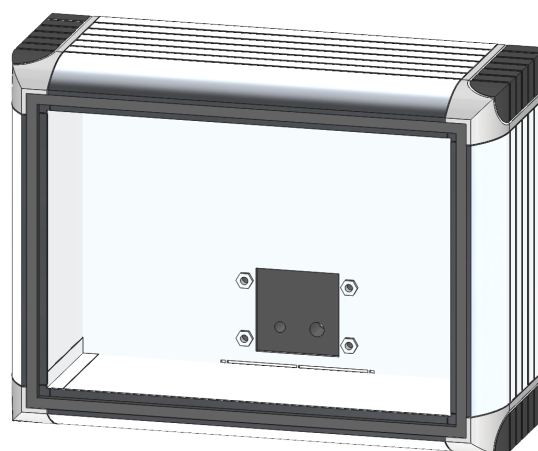- Customizable cable outlet
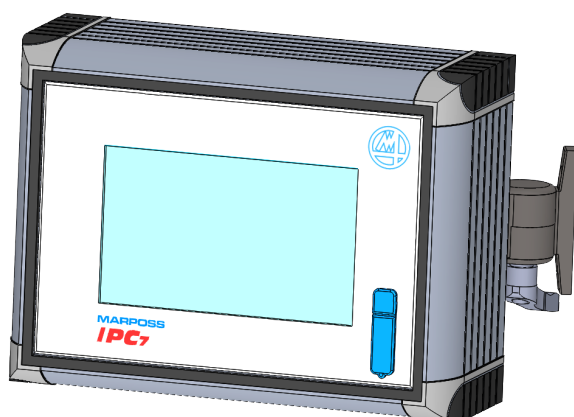
Illustration similar

EL-IPC-7 HOUSING FOR **IPC**7

Mounting

Illustration similar

Mounting example: Vertical mounting with frame connector

Mounting accessories

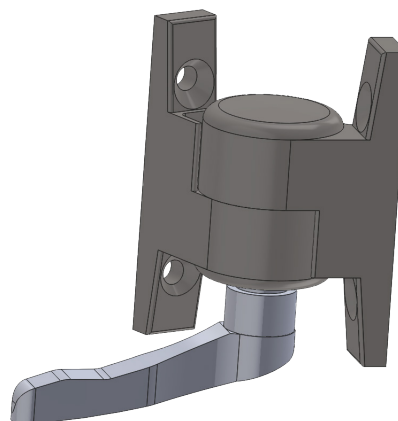*Illustration similar*

Frame connector for use between housing and horizontal or vertical surfaces
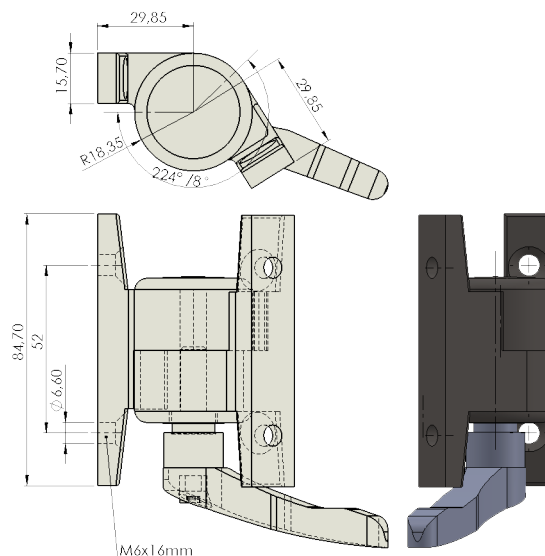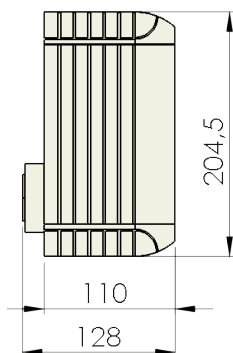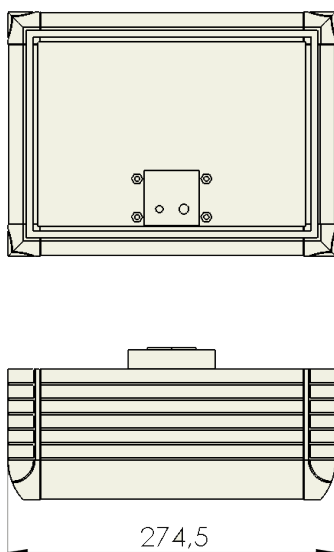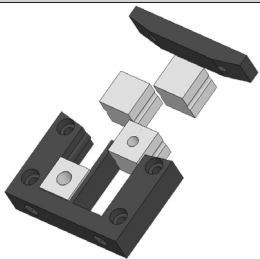
Illustration similar

GENERAL DATA

CODE	O6134000027
DIMENSIONS	see drawing
INTENDED PURPOSE	Housing for **IPC**7
WEIGHT	approx. 3 kg
DEGREE OF PROTECTION	IP65
FASTENING	M6 x 16
INSTALLATION DEPTH	100 mm

MATERIAL

HOUSING	Aluminum profile
CORNER PIECES	Zinc die-cast
CORNER PROTECTORS	Plastic

COLOR

HOUSING	Aluminum, anodized
CORNER PIECES	RAL 7035
CORNER PROTECTORS	similar to RAL 7024

CABLE FEED-THROUGH

4 CABLE OUTLETS

- CUSTOMIZABLE

- 6 ... 12 MM

Illustration similar

FRAME CONNECTOR

INTENDED PRUPOSE	Use between housing and horizontal or vertical surfaces
MATERIAL	Zinc die-cast
SURFACE	Powder-coated
COLOR	RAL 7024
SCOPE OF SUPPLY	Fastening material and clamp lever for both sides included
SWING RANGE / SWING ANGLE	Swing range 224°, angular adjustment in steps of 8°
WEIGHT	0. 363 kg

SCOPE OF DELIVERY

	• Housing with screwable back panel, sealing included
	• Frame connector
	• Installation material
	• Cable feed-through

CONFORMITY	CE, UKCA

www.marposs.com

Marposs has an integrated system for Company quality, environmental and safety management, with ISO 9001, ISO 14001 and OHSAS 18001 certification.

Download the latest version
of this document