EL-IPC-10

Properties

- Housing with screwable bacl panel for **IPC**10 operator panels
- Aluminum, high thermal conductivity for optimal passive thermal dissipation
- Degree of protection IP65
- Low weight at high stability
- Mounting accessories and fastening material included
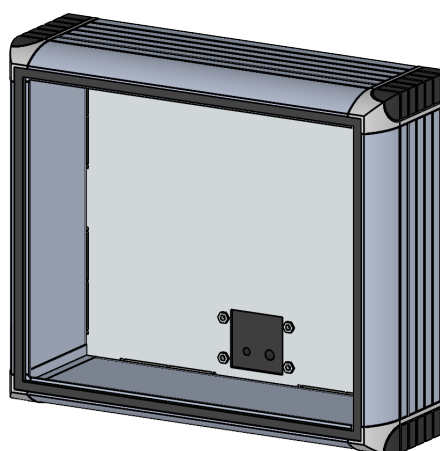- Customizable cable outlet

Illustration similar

EL-IPC-10 HOUSING FOR **IPC**10
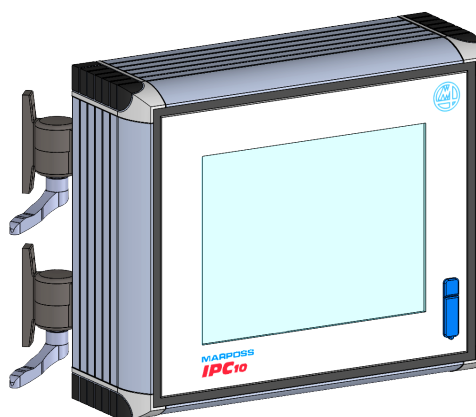
Mounting

Illustration similar

Mounting example: Vertical mounting with frame connector

Mounting accessories

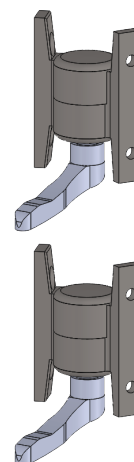*Illustration similar*

2 x Frame connector for use between housing and horizontal or vertical surfaces
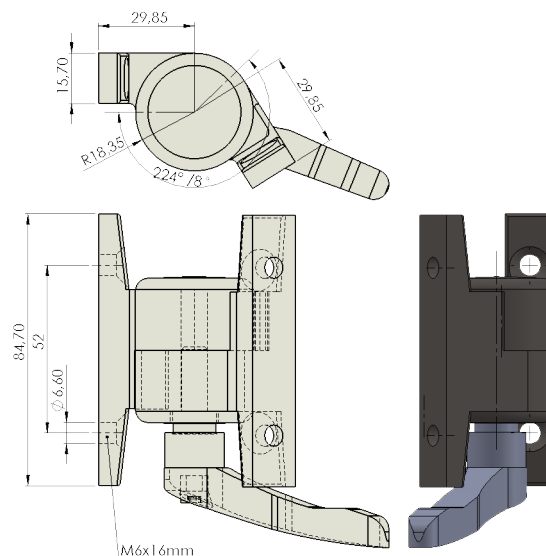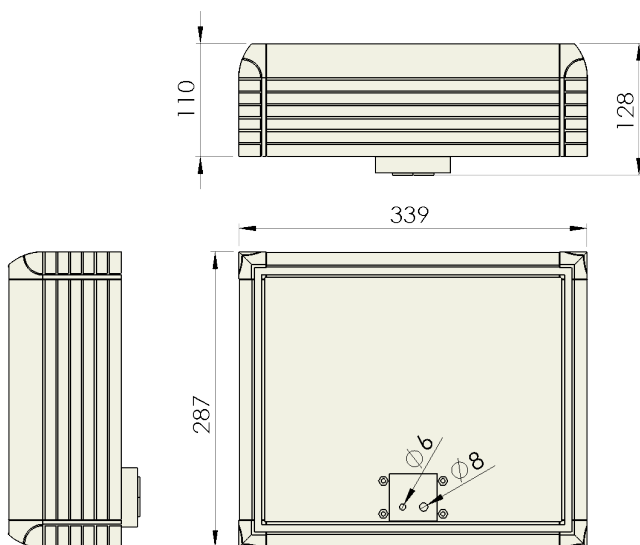
Illusttration similar

GENERAL DATA

CODE	O6134000028
DIMENSIONS	see drawing
INTENDED PURPOSE	Housing for **IPC**10
WEIGHT	approx. 3.8 kg (frame connectors included)
DEGREE OF PROTECTION	IP65
FASTENING	M6 x 16
INSTALLATION DEPTH	100 mm

MATERIAL

HOUSING	Aluminum profile
CORNER PIECES	Zinc die-cast
CORNER PROTECTORS	Plastic

COLOR

HOUSING	Aluminum, anodized
CORNER PIECES	RAL 7035
CORNER PROTECTORS	similar RAL 7024

CABLE FEED-THROUGH

4 CABLE OUTLETS

• CUSTOMIZABLE

• 6 ... 12 MM

Illustration similar

FRAME CONNECTOR

INTENDED PURPOSE	Use between housing and horizontal or vertical surfaces
MATERIAL	Zinc die-cast
SURFACE	Poweder coated
COLOR	RAL 7024
SCOPE OF SUPPLY	Fastening material and clamp lever for both sides included
SWING RANGE / SWING ANGLE	Swing range 224°, angular adjustment in steps of 8°
WEIGHT	0.726 kg (2 pieces)
DRILLING DISTANCE	

SCOPE OF DELIVERY

• Housing with screwable back panel, sealing included

• 2 frame connectors

• Installation materiall

• Cable feed-through

CONFORMITY	CE, UKCA