

# ENDO 0.2/D8

NEW 2020




## Chromatic Confocal Controller

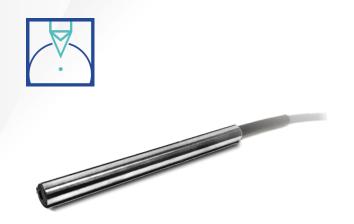

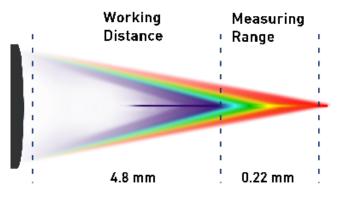

Working with any STIL optoelectronic controller, the ENDO series allows precise measurements with a sub-micron resolution.

- Small external diameters (from 4mm to 8mm), ideal for the integration of several sensors
- Axial or radial screws with 90 degree return
- Lightweight and compact for easy integration

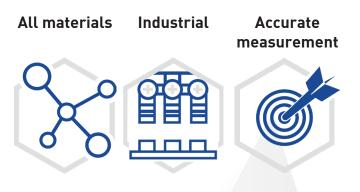

DESIGNED FOR

#### Mechanics



Aerospace



www.stil-sensors.com

Semiconductors



Glass



PERFECT FOR

Distance

Thickness

### Roughness



Shape



info@stil-sensors.com

+33 (0)4 42 39 66 51

# ENDO 0.2/D8

NEW 2020



# Chromatic Confocal Controller



## **DIMENSIONAL DRAWING\***



Nota: All dimensions are in mm



## SPECIFICATIONS\*

Product	Unit	ENDO 0.2/D8
Order code		03PS0382002
Measuring Range	mm	0.22
Working Distance	mm	4.8
Numerical aperture		0.39
Max. sample slope	0	± 21.5
Axial model		Axial
Max. linearity error**	μm	± 50
Static noise**	nm	25
Axial resolution**	μm	0.15
Lateral resolution	μm	2.5
Spot size	μm	4.6
Photometric efficiency		16
Min. measurable thickness***	μm	25
Length Diameter Weight	mm mm g	102 8 20

\*\* With CCS electronics (PRIMA & OPTIMA+)

\*\*\* Typical value considering a layer of glass, i.e. considering a refractive index n=1.51



## ASSOCIATED WITH

### **INTEGRATED OPTICAL FIBER**

- 3 m optical fiber included with E2000 connector

Special fiber length available on demand

CONTROLLER



+33 (0)4 42 39 66 51

PHI8-200-N2-0822

### www.stil-sensors.com

info@stil-sensors.com Some of the items supplied by STIL S.A.S., or parts of them, may be subject to export control if exported outside the European Union, or may be subject to restrictive measures adopted by the competent national, supranational or international authorities. Buyer of the items delivered by STIL S.A.S. shall comply with all applicable export control and sanctions laws and regulations.

\*Specifications are subject to modifications