



HORIZON

INTERFEROMETRIC CONTROLLERS



Interferometric Point Controllers

HORIZON™ is a family of controllers designed to work with optical sensor heads for measuring thickness and distances. Based on interferometric technology and combined with a dedicated software package for data processing, it provides the ideal solution for high-accuracy measurements in applications where contact with the part is not possible.

STIL

HORIZON


ChromaPoint Controllers




ChromaPoint Sensor Heads



Interferometric Point Controllers



ChromaLine Controllers



ChromaLine Sensor Heads



ChromaVision Camera



Accessory



HORIZON controllers allow high precision measurements without contact and without risk of damaging the parts.

Among the various advantages of these controllers is the measurement of distance and thickness at very high resolution on all types of surfaces and materials, including reflective surfaces.

The performance depends on the controller model and the dedicated optical sensor.

Thickness measurement on glass, as well as transparent and opaque films, is achieved with a single controller in combination with a high-precision sensor for sub-micron accuracy.

HORIZON controllers (visible and infrared light source) are compatible with all Marposs or Stil sensor heads with a performance adapted to each measurement range (thickness and distance).



HORIZON

Horizon offers the best price/performance rates for OEM integration.

It is available in 1CH version.

The HW and SW architecture can offer the best interface from the HW point of view (machine) and SW point of view (third-party SW).

With different light sources it offers best performance on the market. In combination with dedicated optical sensor heads, it is perfect for wafer, medical devices, electronic components and in general for all applications where non contact measure is required with extreme high accuracy.

Horizon is a complementary product family to Marposs P3IF family specifically designed for In Process BG applications in Semicon industry.

Benefits

- Interferometric technology is versatile, suitable for transparent, semi-transparent, and opaque materials, including advanced semiconductor coatings
- High Precision & Stability guarantee reliable measurement of thin films, wafers, and coatings with exceptional repeatability and accuracy.
- Possibility to be used in chain configuration for multi-points application (all measures are synchronized)
- Availability of SDK and protocol commands for easy integration into any system
- Synchronized measurement with encoder for dynamic acquisitions
- Several interfaces for communication: Ethernet, USB, RS232/422, analog, fieldbus

The product

Interferometric technology is an advanced solution for measuring thickness, distances, and dimensional variations with extremely high precision, down to sub-micron levels.

- In the electronics industry, interferometry is used to measure the thickness of thin layers in integrated circuits or displays, ensuring uniformity and flatness in high-density production processes.
- In the automotive sector, it is employed for dimensional inspections of reflective metal surfaces and transparent components, such as glass and optical films. It is also essential for ensuring precise alignment and coupling of mechanical parts.
- The medical field benefits from this technology in the production of precision devices like optical lenses, surgical instruments, and miniaturized sensors. Interferometry ensures these components meet the stringent quality standards required.
- In aerospace applications, it is used to measure the quality of composite materials and monitor structural deformations under extreme conditions. This technology enhances the reliability of critical components and minimizes the risk of failure.
- Interferometric solutions are also crucial in semiconductor industry. Real-Time Monitoring supports inline process control, reducing material waste and enhancing production efficiency.
- In the EV market segment, we may offer solutions to measure for example paint thickness on battery cells and coating thickness on magnet wire.

With the ability to adapt to various surfaces and materials, including highly reflective and transparent ones, interferometric technology is an indispensable choice for industries where precision, reliability, and measurement speed are critical.

STIL


HORIZON

Technical Specifications

Controller type	HORIZONS1	HORIZONS2	HORIZONT1	HORIZONW1	HORIZONL2
Order code	B830T400000	B830T401000	B830T404000	B830T406000	B830T405000
Measuring principle	interferometric	interferometric	interferometric	interferometric	interferometric
Channels	1	1	1	1	1
Measure type	Thickness, distance	Thickness, distance	Thickness, distance	Thickness, distance	Thickness, distance
Sampling rate	2000	2000	2000	2000	2000
Light source	SLED	SLED	SLED	LED	LED
Wave lenght	1310	1310	1020	350 ÷ 700	750
Measuring range*	37 ÷ 1850	74 ÷ 3700	15 ÷ 850	2,25 ÷ 225	60 ÷ 3000
Accuracy	≤ 1 µm	≤ 2 µm	≤ 1 µm	≤ 0.5 µm	≤ 1 µm
Axial resolution	30 nm	30 nm	30 nm	30 nm	30 nm
Measuring mode	Distance Thickness	Distance Thickness	Distance Thickness	Distance Thickness	Distance Thickness
Encoder input	3 digital (TTL/HTL Differential/Single Ended)				
Digital port	USB / ETH / RS442				
Analog output	2 (0-10Vdc)				
Synchronization	1 Synchro input (TTL) / 1 Synchro output (TTL)				
Interfaces	Ethernet (10/100 Mbit) [RS232 / RS422 as option]				
Network connection	YES				
Power supply	12 ÷ 24 Vdc (+20% / - 15%)				
Power consumption	30 W				
Protection degree	IP40				
Wheight	2,8 Kg				
Dimension	239 (w) x 157,5 (h) 131,15 (d)				

* In air with refractive index = 1

DIMENSIONS (mm)

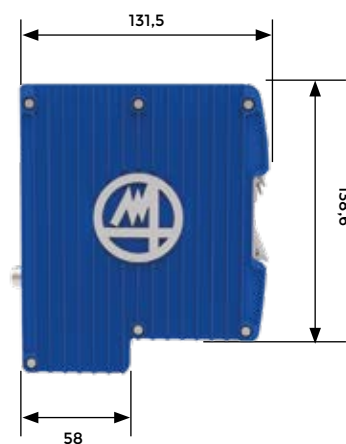


ChromaPoint
Controllers




ChromaPoint
Sensor Heads



Interferometric
Point Controllers



ChromaLine
Controllers



ChromaLine
Sensor Heads



ChromaVision
Camera



Accessory



STIL

HORIZON

THE PRODUCT LINE


ChromaPoint Controllers




ChromaPoint Sensor Heads



Interferometric Point Controllers



ChromaLine Controllers



ChromaLine Sensor Heads



ChromaVision Camera



Accessory



Probe Code		B3PITS20A01	B3PITT10A00	B3PITL20A01	B3PITL20A00	B3PITS20A00
Description		PROBE IF-S1-S2 10 mm	PROBE IF-T1 100 mm	PROBE IF-L2 50 mm	PROBE IF-L2 50 mm	PROBE IF-S1-S2 100 mm
Distance		-	-	-	-	-
Tickness		•	•	•	•	•
Axial		•	•	•	•	•
Stand off (SO)	[mm]	10	100	50	50	100
Max. Slope Angle	[°]	2,6	1,5	5	2,6	1,5
Spot size	µm	20	15	70	180	25
Dimensions - [mm]	Ø	18	18	22	22	18
	L	69	80,7	86	77	74,3
Controller	HORIZONS1	•				•
	HORIZONS2	•				•
	HORIZONT1		•			
	HORIZONW1					
	HORIZONL2			•	•	

Probe code		B3PITW10A00	B3PIRS20A01	O3PS05D1401	O3PS05T7001	O3PS05T3501	O3PS0500001
Description		PROBE IF-WL 28 mm	PROBE IF-S1-S2-REF 15 mm	"OPILB-LWD-D +MG140"	"OPILB-LWD-T +MG70"	"OPILB-LWD-T +MG35"	OPILB
Distance		-	•	•	-	-	-
Tickness		•	•	•	•	•	•
Axial		•	•	•	•	•	•
Stand off (SO)	[mm]	28	15	4,6	9,2	9,2	42
Max. Slope Angle	[°]	7	2,6	17	17	17	5,4
Spot size	µm	70	20	5,7	11,4	22,9	32
Dimensions - [mm]	Ø	20	30	27	27	27	15
	L	138	147	191,3	153,4	122,7	127,2
Controller	HORIZONS1		•				
	HORIZONS2		•				
	HORIZONT1						
	HORIZONW1	•		•	•	•	•
	HORIZONL2						

OPTICAL FIBER


Code	B2974000142	B2974000123	B2974000140	B2974000126	B29T5016320	B2974000128	B29T5016330
Description	SM9/125_3M_E2000/ APC-FC/APC_PP	SM9/125_4M_ E2000/APC-FC/ APC_PP	SM5.3/125_3M_ E2000/APC-FC/ APC_PP	SM5.3/125_4M_ E2000/APC-FC/ APC_PP	MM50/125_3M_ E2000/APC-FC/ APC_PP	MM50/125_4M_ E2000/APC-FC/ APC_PP	MM50/125_3M_ E2000/APC-FC/ APC_PP
Lenght [m]	3	4	3	4	3	4	3
Type	Not armored 3mm	Not armored 3mm	Not armored 3mm	Not armored 3mm	Not armored 3mm	Not armored 3mm	Not armored 3mm
Ø [mm]	3	3	3	3	3	3	3
HORIZONS1	•	•					
HORIZONS2	•	•					
HORIZONT1			•	•			
HORIZONW1						•	•
HORIZONL2					•	•	

STIL


HORIZON

Dimensions of optical sensors


B3PITS20A01




B3PITT10A00



B3PITL20A00




B3PITL20A01



B3PITW10A00




B3PITS20A00




O3PS05D1401




O3PS05T7001

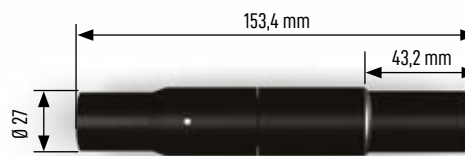

O3PS05T3501

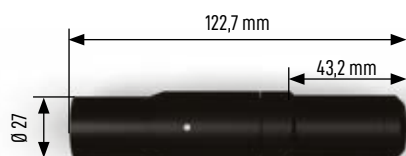

O3PS0500001




ChromaPoint
Controllers




ChromaPoint
Sensor Heads



Interferometric
Point Controllers



ChromaLine
Controllers



ChromaLine
Sensor Heads



ChromaVision
Camera



Accessory



Application examples

AOI machine - Silicon Wafer thickness and warpage

HORIZON (interferometry) combined with ZENITH (chromatic confocal) controller are the proper solutions for a precise wafer thickness and shape control.

Wafer thickness measurement

HORIZON can supply an accurate to measure not only for silicon but even for the new compound semiconductor wafers (like SiC and GaN)

Mask positioning

Coating thickness measurement of magnet wire

HORIZON has the capability to control the uniformity of both transparent and opaque coatings. Controlling the thickness of the insulation coating is essential in the manufacturing of magnet wire, particularly in the rectangular section versions used in the production of hairpin stators for traction e-motors. The interferometric technology used in Horizon guarantees the possibility of measuring the thickness of the insulating coating even on magnet wire with extruded PEEK, which are not transparent to white light.

STIL

HORIZON


ChromaPoint
Controllers




ChromaPoint
Sensor Heads



Interferometric
Point Controllers



ChromaLine
Controllers



ChromaLine
Sensor Heads



ChromaVision
Camera



Accessory



Connections

HORIZON is a controller designed for easy HW integration.

The device is complete and fully equipped with the following:

- **2 x Analog Output 0-10V**
It makes simple to get the measure value directly connected to PLC Analogue Input card.
- **3 x Encoder Input**
High precision synchronization is available to 3D profile reconstruction or dynamic measure performed
- **in line 1 ETH connection** for device configuration and machine interface.
- **4 x USB** – FW Update & Service
- **Anybus Expansion Slot**
To get extremely high flexibility compatible with the most industrial communication bus:
 - EtherCAT
 - Profinet
 - Modbus TCP
 - CANopen
 - Others are available
- **IO Synch Connection**
It is possible to use HW trigger for measure acquisition or use this function to let a chain of controllers working fully synchronized.



Sw TOOL

Device Configuration

HORIZON is provided by MIC Tool, its configurator software to perform dedicated settings in relation to part to be measured and application requirements.

To simplify integration, each controller comes equipped with a comprehensive Software Development Kit (MIC TOOL SDK).

Device Integration

HORIZON can be integrated through 2 main tools:

- SDK toolset
- Quick SPC™

SDK toolset has been designed using the most robust and efficient software environments C++, C, and C# leveraging state-of-the-art development technologies to ensure high performance and reliability. Integration examples are included, and you will benefit from Marposs's dedicated support to streamline your integration process.

The SDK toolset will make easy and simple the integration in third-party SW.



Quick SPC™ for Windows® is a suite of software products designed to comply with any requirement ranging from simple measurement acquisition to complex gauging applications.

This SW for Process and QUALITY control is born to be framed with a simple, wizard-driven, common user interface that make possible to complement the base product using software Add-ons purposely conceived for specialized industry fields.

QUICKSPC

STIL

Horizon

ChromaPoint
Controllers




ChromaPoint
Sensor Heads



Interferometric
Point Controllers



ChromaLine
Controllers



ChromaLine
Sensor Heads



ChromaVision
Camera




Accessory



THE PRODUCT LINE

HORIZON™ is the perfect solution for applications where precision, accuracy, reliability, and ease of use are essential requirements. As the interferometric solution from the Marposs group, Horizon combines advanced technology with dedicated application consulting, working together with our partners to shape innovative solutions for the future.

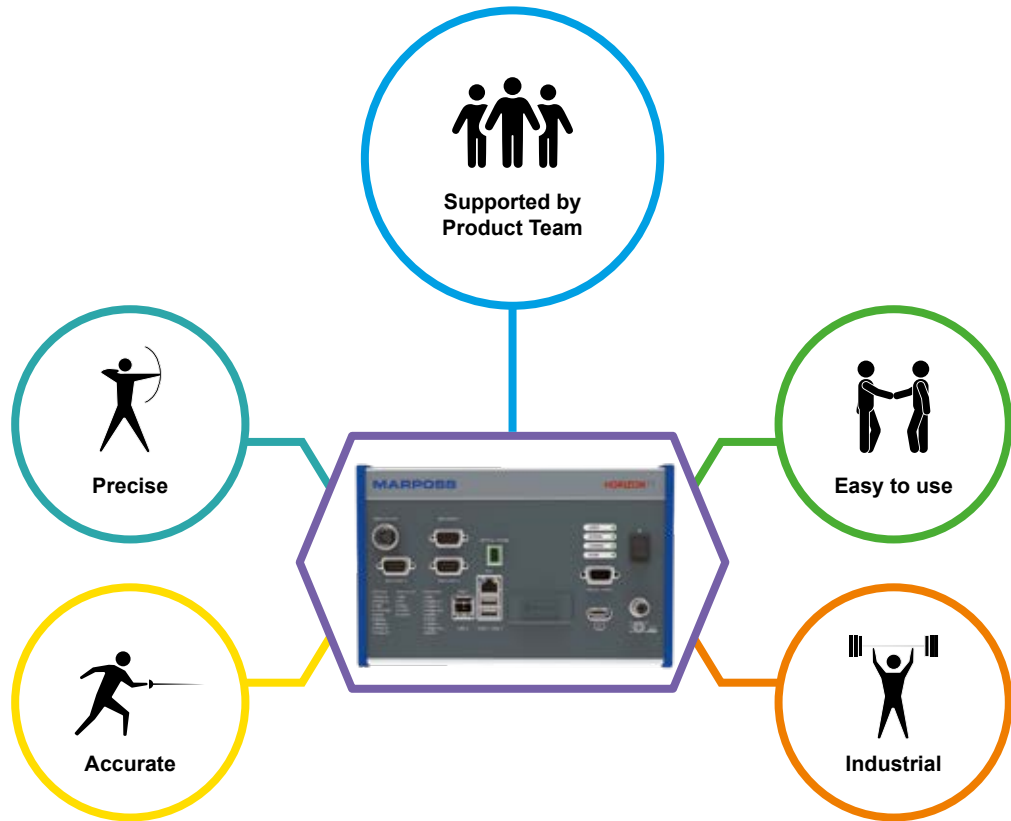


ChromaPoint
Controllers



ChromaPoint
Sensor Heads



Interferometric
Point Controllers



ChromaLine
Controllers



ChromaLine
Sensor Heads



ChromaVision
Camera



Accessory



BD6D03300G0 - Edition 03/2025 - Specifications are subject to modifications - © Copyright 2025 Marposs S.p.A. (Italy) - All rights reserved
This document and its content are exclusive property of Marposs or other companies of the Marposs Group and they cannot be used to train any artificial intelligence, machine learning, large language models, or other similar networks, algorithms, or systems etc.. Without prior written consent, they cannot be used, totally or partially, for purposes different from those expressly allowed. Offenders will be prosecuted. The rights of third parties are acknowledged to the respective owners.

MARPOSS, ® and other names/signs of the Marposs Group shown therein are registered trademarks or trademarks of Marposs S.p.A. or other companies of the Group in the U.S.A. and other Countries.

Some models of the product line, or parts of them, may be subject to export restrictions if exported outside the European Union or may be subject to restrictive measures adopted by the competent national, supranational or international authorities.

STIL

HORIZON