




HUMAN INTERFACE

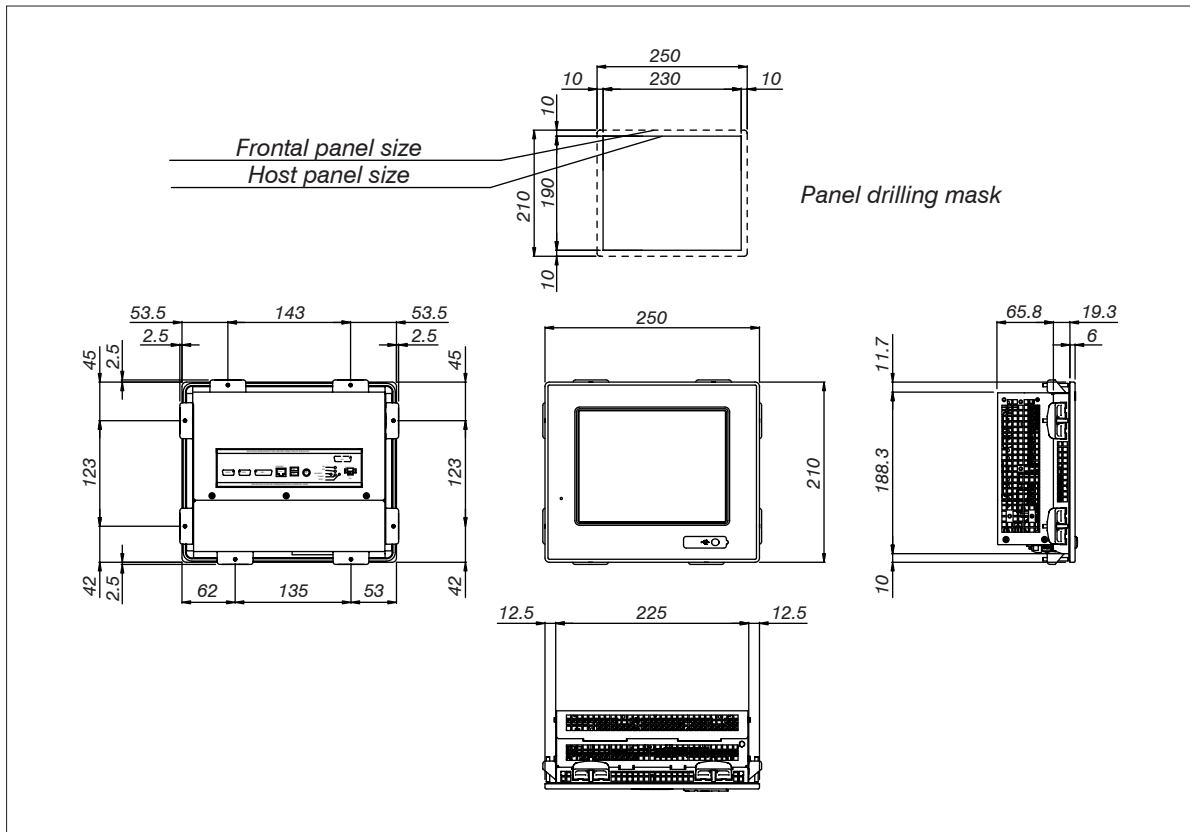

Technical features

Technical specification

Display	LCD TFT 8.4" SVGA 800x600 Touch screen
Display angle	100° horizontal 90° vertical
Operating system	Windows XP® Embedded
RAM memory	512 MB
Screen RAM memory	8 MB
Case	For panel assembly
Frontal protection degree (IEC 60529 standard)	IP65
Power supply	18 ÷ 36 Vdc -Vdc input connected to case
Compact flash slot	1 slot type II external access
Compact flash	1 x 512 MB
Frontal access I/F	1 x USB 2.0
Back access I/F	<ul style="list-style-type: none"> • 1 x Ethernet 10/100 Mbps RJ45 connector • 1 x PS/2 keyboard/mouse connector • 2 x USB 2.0 • 1 x VGA analogue
Back access serial I/F	<ul style="list-style-type: none"> • 1 x RS232 DB9 male connector • 1 x RS232/422/484 DB15 male connector
Operating temperature	0 ÷ 50°C
Storage temperature	-20 ÷ 60°C
Max humidity	80%

Pre-installed software

Tool monitoring	CS2ETH.SW
Vibration monitoring	CS150DG2.SW

Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.



MARPOSS
www.marposs.com

For a full list of address locations, please consult the Marposs official website

D6C05800G0 - Edition 04/2010 - Specifications are subject to modifications
© Copyright 2009-2010 MARPOSS S.p.A. (Italy) - All rights reserved.

MARPOSS, ® and Marposs product names/signs mentioned or shown herein are registered trademarks or trademarks of Marposs in the United States and other countries. The rights, if any, of third parties on trademarks or registered trademarks mentioned in the present publication are acknowledged to the respective owners.

Marposs has an integrated system to manage the Company quality, the environment and safety, attested by ISO 9001, ISO 14001 and OHSAS 18001 certifications. Marposs has further been qualified EAQF 94 and has obtained the Q1-Award.



MARPOSS