



simple measurement applications intuitively and rapidly. Nemo is capable of acquiring data from traditional and wireless measurement devices and storing them locally or uploading them to a LAN network. The 5.7" colour display guarantees easy to read measurements, and the touch screen enables the operator to carry out programming operations and acquire data, without the need for external input devices. Thanks to its embedded architecture, the Nemo is smaller than a sheet of A5 paper, while the built in Secure Digital micro card provides powerful memory capacity. Nemo software guarantees a friendly and easy to use operator interface. Its touch-screen designed human interface allows to program and acquire measures without any additional input/command device.

SUBCOMPACT EMBEDDED GAUGE COMPUTER

Nemo, compact, robust and reliable professional computer has

been designed for simple measuring applications up to 16 sensors and 8 measures and offers innovative features that enable to perform




NEMO DIGI BOX + 2 USB

NEMO 2 USB

NEMO 8 USB

MAIN HARDWARE CHARACTERISTICS

CASE	Robust industrial-grade plastic case
PROTECTION	IP 54 on front panel; IP 40 on rear panel
TOUCH SCREEN	4 wire analog-resistive
STORAGE MEDIA	Internal SD Micro card 4 GB
LCD DISPLAY TYPE	5.7" color TFT
ETHERNET LAN	2 x 10/100 Mbps RJ45 connector
USB PORTS	2 x type B + 1 x type A
SERIAL PORT	1 x RS232C
BENCH-TOP SUPPORT	Reclinable
DIMENSIONS	160 x 138 x 33 mm (6.3" x 5.4" x 1.3") L x H x D
OPERATING TEMPERATURE	5 ÷ 45 °C (41 ÷ 113 °F)
STORAGE TEMPERATURE	-10 ÷ 55 °C (14 ÷ 131 °F)

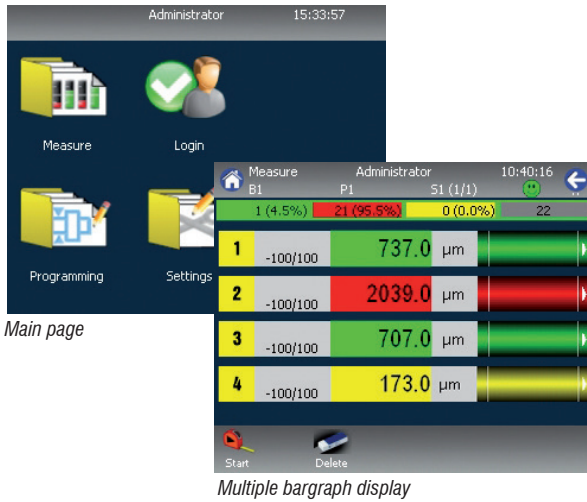

Main page

Multiple bargraph display



Settings

Characteristics programming

MEASUREMENTS

- Up to 16 sensors connectable via USB, RS232 or Bluetooth® wireless technology
- Data collection from Marposs Easy Box™, Digi Crown™, M1 Wave™, i-Wave™ and third-party serial devices
- Measurement capability up to 8 characteristics
- Multiple measurement display with numeric and graphical layout
- Acquisition command through external signal (footswitch, push buttons) or touch-screen
- Part counters
- Remote data storage through Ethernet LAN (Integrated FTP Server) or removable USB memory device
- Data storage format: .DFQ (Q-DAS® qs-STAT®) and .CSV (Microsoft® Excel Comma Separated Values).

CONFIGURATION AND PROGRAMMING

- Multi-language support for European and Asian languages: English, Italian, German, French, Spanish, Brazilian, Portuguese, Swedish, Japanese, Chinese, Dutch, Polish, Magyar, Czech, Korean, Turkish, Finnish. Other language versions available upon request
- Programming interface designed to be used with touch-screen
- Configuration Backup-Restore-Update by USB memory devices or through Ethernet LAN
- Password protected multi-user management

HOW TO ORDER

DESCRIPTION	ORDER CODE
NEMO DIGI BOX + 2 USB	830NA00002
NEMO 2 USB	830NA00011
NEMO 8 USB	830NA00031
FOOTSWITCH with 2 m cable for data triggering function	6738099035

For a full list of address locations, please consult the Marposs official website

D6D00901G1 - Edition 04/2019 - Specifications are subject to modifications © Copyright 2019 MARPOSS S.p.A. (Italy) - All rights reserved.

MARPOSS, logo and Marposs product names/signs mentioned or shown herein are registered trademarks or trademarks of Marposs in the United States and other countries. The rights, if any, of third parties on trademarks or registered trademarks mentioned in the present publication are acknowledged to the respective owners.

Marposs has an integrated system to manage the Company quality, the environment and safety, attested by ISO 9001, ISO 14001 and OHSAS 18001 certifications.

Some models of the product line, or parts of them, may be subject to export restrictions if exported outside the European Union or may be subject to restrictive measures adopted by the competent national, supranational or international authorities.